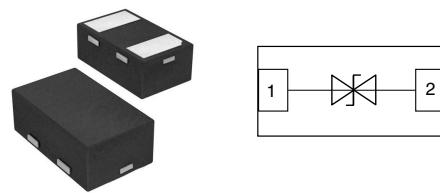


## ESD Protection Diode in DFN1006

### Features

- 480Watts peak pulse power ( $T_p = 8/20\mu s$ )
- DFN1006 package
- Bidirectional configurations
- Low clamping voltage
- Low leakage current
- Normal capacitance ( $C_j=140\text{pF}$  typ.)
- Protection one data/power line to:  
IEC 61000-4-2  $\pm 30\text{kV}$  contact  $\pm 30\text{kV}$  air  
IEC 61000-4-4 (EFT) 40A (5/50ns)  
IEC 61000-4-5 (Lightning) 40A (8/20 $\mu s$ )



### Mechanical Data

- **Case:** DFN1006 (plastic package).  
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**  
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:  
 $260\text{ }^{\circ}\text{C}/10$  sec. at terminals

### Applications

- Microprocessor based equipment
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- Portable Instrumentation

### Absolute Maximum Ratings

Ratings at  $25\text{ }^{\circ}\text{C}$ , ambient temperature unless otherwise specified

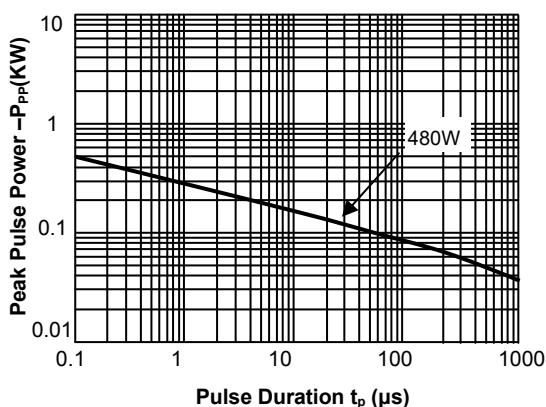
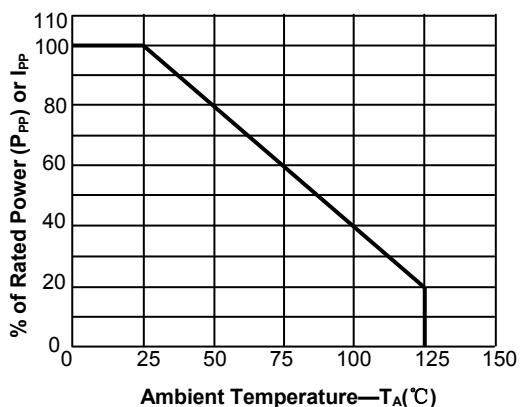
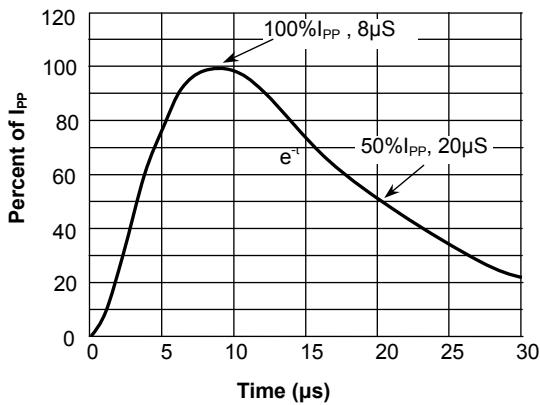
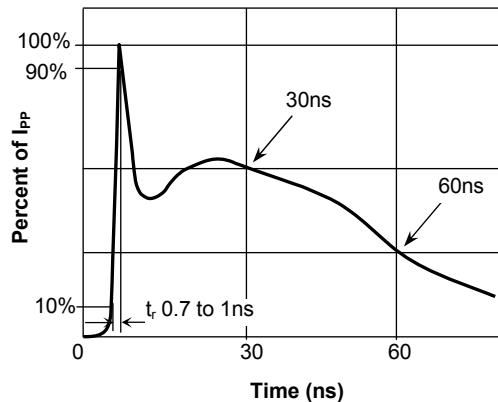
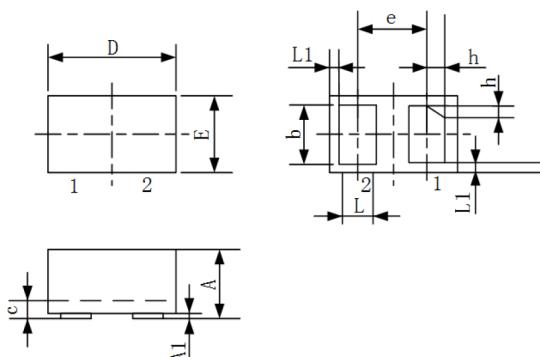
Parameter	Symbol	Value	Unit
Peak Pulse Power ( $T_p=8/20\mu s$ )	$P_{PP}$	480	W
ESD contact/air discharge (IEC-61000-4-2)	$V_{ESD}$	30/30	kV
Peak Pulse Current ( $T_p = 8/20\mu s$ )	$I_{PP}$	40	A
Junction Temperature	$T_J$	-55 to +150	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-55 to +150	$^{\circ}\text{C}$

### Electrical Characteristics

( $T_A = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

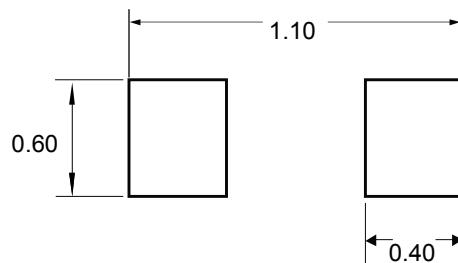
Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	$V_{RWM}$				6.5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1\text{mA}$	7.2			V
Reverse Leakage Current	$I_R$	$V_{RWM}=6.5\text{V}$			1.0	$\mu\text{A}$
Clamping Voltage (IEC 61000-4-5)	$V_C$	$I_{PP}=40\text{A}$			12	V
Junction Capacitance	$C_J$	$V_R=0\text{V}, f=1\text{MHz}$		140		pF

**Typical Characteristics** ( $T_{amb} = 25^{\circ}\text{C}$  unless otherwise specified)

**Fig.1 Peak Pulse Power Rating Curve**

**Fig.2 Pulse Derating Curve**

**Fig.3 Pulse Waveform-8/20μs**

**Fig.4 Pulse Waveform-ESD(IEC61000-4-2)**

**Package Dimensions**


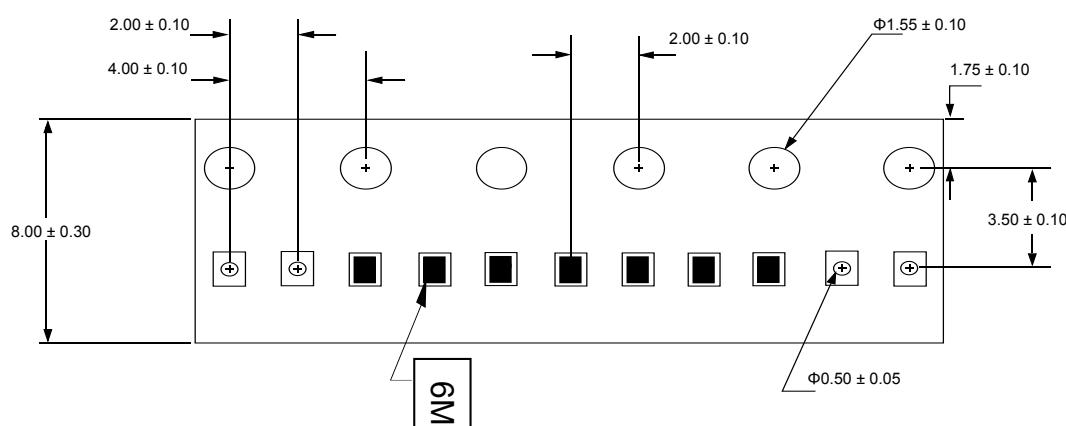
Symbol	Dimensions in millimeters		
	Min	Nom	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.45	0.50	0.55
L	0.20	0.25	0.30
e	0.65 BSC		
A	0.40	0.50	0.55
A1	0	0.02	0.05
c	0.12	0.15	0.18
h	0.07	0.12	0.17
L1	0.05 REF		

### Pad Dimensions



Unit:mm

### Tape and Reel Specification



Unit:mm

### Marking

6M

### Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
TESD1006HC6V5B	DFN1006	Tape and reel	10000pcs / reel	EIA STD RS-481