


9 G8 'DfchYW]cb'8]cXY]b'DFN1006

: YUi fYg

- 80Watts peak pulse power ($T_P = 8/20\mu s$)
- DFN1006 package
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Medium capacitance ($C_J = 15pF$ typ.)
- Protection one data/power line to:
 - IEC 61000-4-2 $\pm 30kV$ contact $\pm 30kV$ air
 - IEC 61000-4-4 (EFT) 40A (5/50ns)
 - IEC 61000-4-5 (Lightning) 8A (8/20 μs)

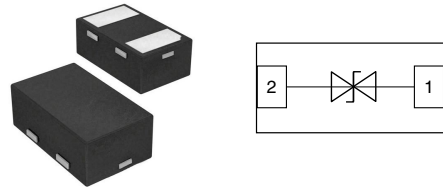

Mechanical Data

- **Case:** DFN1006 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Audio Line, Speaker, Headset, Microphone Protection
- Human Interface Devices (Keyboard, Touchpad, Buttons)

5 Vgc`i hY'AU]a i a 'FU]b[g

Ratings at 25 °C, ambient temperature unless otherwise specified


Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_P = 8/20\mu s$)	P_{PP}	80	W
ESD contact/air discharge (IEC-61000-4-2)	V_{ESD}	30/30	kV
Peak Pulse Current ($T_P = 8/20\mu s$)	I_{PP}	8	A
Junction Temperature	T_J	-55 to +125	°C
Storage temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics


($T_A = 25$ °C unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1mA$	5.6			V
Reverse Leakage Current	I_R	$V_R = 5V$		0.01	1	μA
Clamping Voltage(SURGE)	V_C	$I_{PP} = 6A, T_P = 8/20\mu s$			10	V
Clamping Voltage(ESD)	V_C	$V_{ESD} = +6kV$		8.5		V
Clamping Voltage(TLP)	V_C	$I_{PP} = 8A, T_P = 100ns$		9		V
Clamping Voltage(TLP)	V_C	$I_{PP} = 16A, T_P = 100ns$		11		V
Dynamic Resistance	R_{dyn}			0.295		Ω
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz$		15		pF


Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

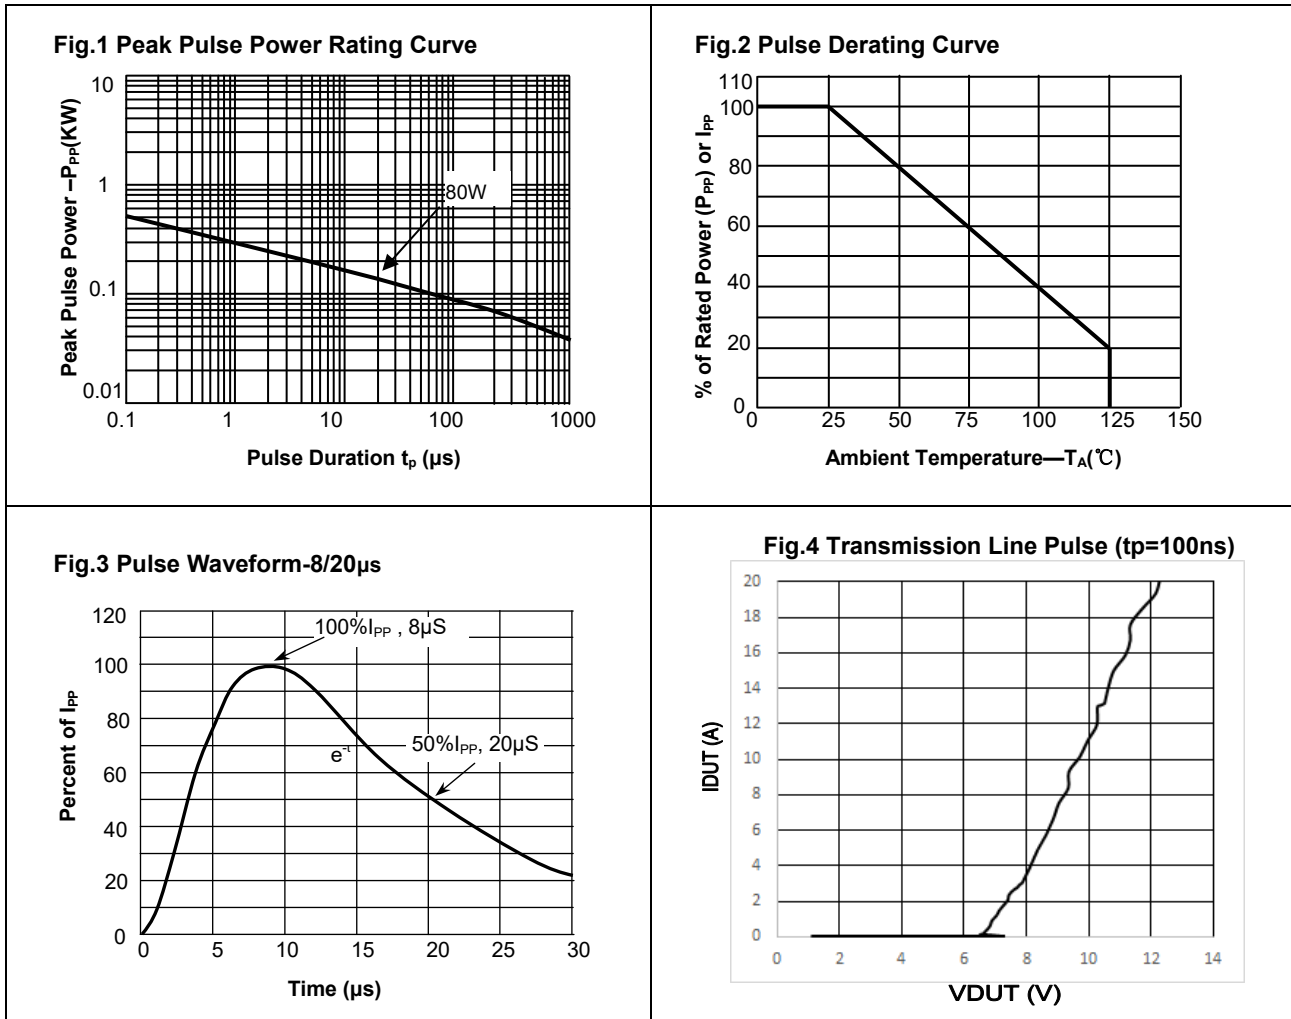


Package Dimensions

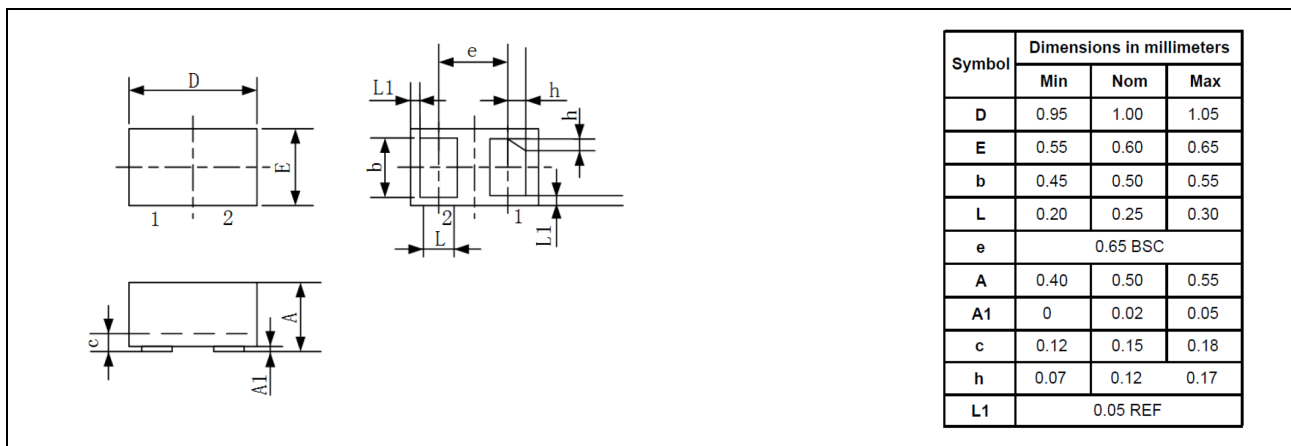


Pad Dimensions

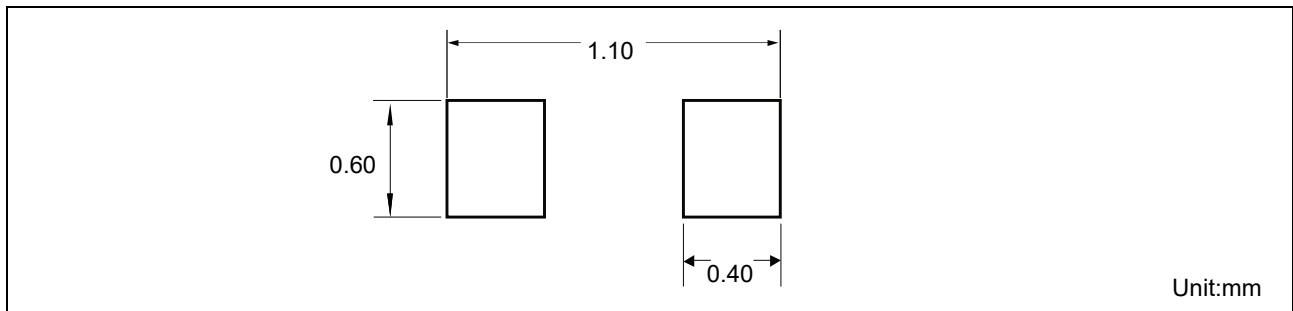

Tape and Reel Specification

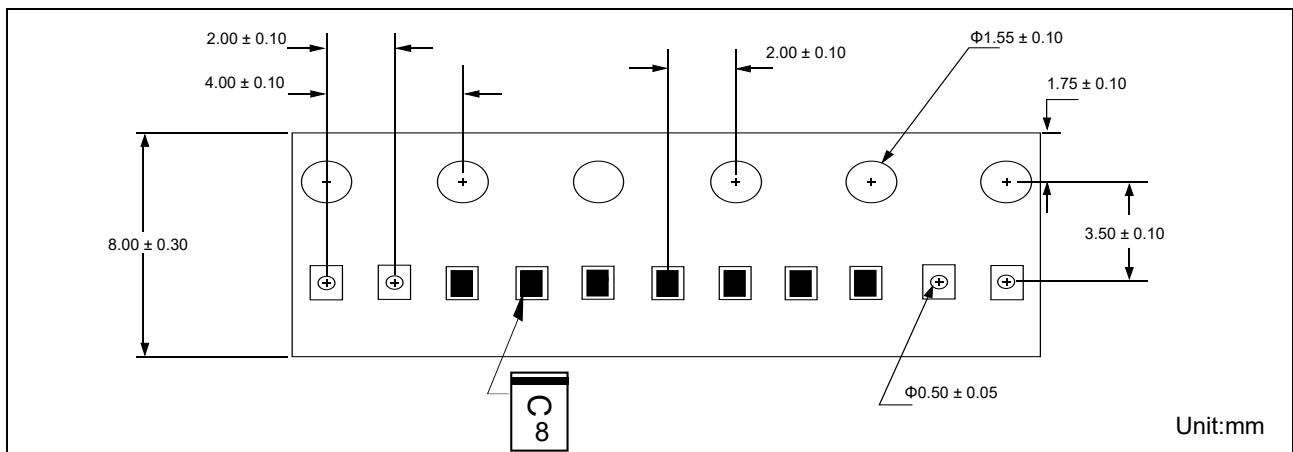

Marking

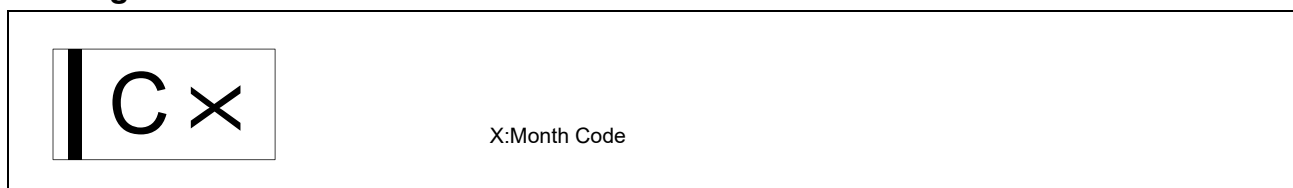

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
TESD1006NC5VB	DFN1006	Tape and reel	10000pcs / reel	EIA STD RS-481