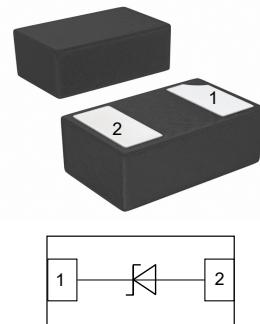


ESD/Surge Protection Diode in DFN1610

Features

- 4500 Watts peak pulse power ($T_p = 8/20\mu s$)
- DFN1610 package
- Unidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Normal capacitance ($C_j=300pF$)
- Protection one data/power line to:
IEC 61000-4-2 ±30kV contact ±30kV air
IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5 (Lightning) 150A (8/20μs)



Mechanical Data

- **Case:** DFN1610 (plastic package)
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Charger Protection
- Parallel & Serial Port Protection
- Personal Digital Assistant (PDA)
- Microcontroller Input Protection
- Cellular Phones
- I²C Bus Protection

Absolute Maximum Ratings

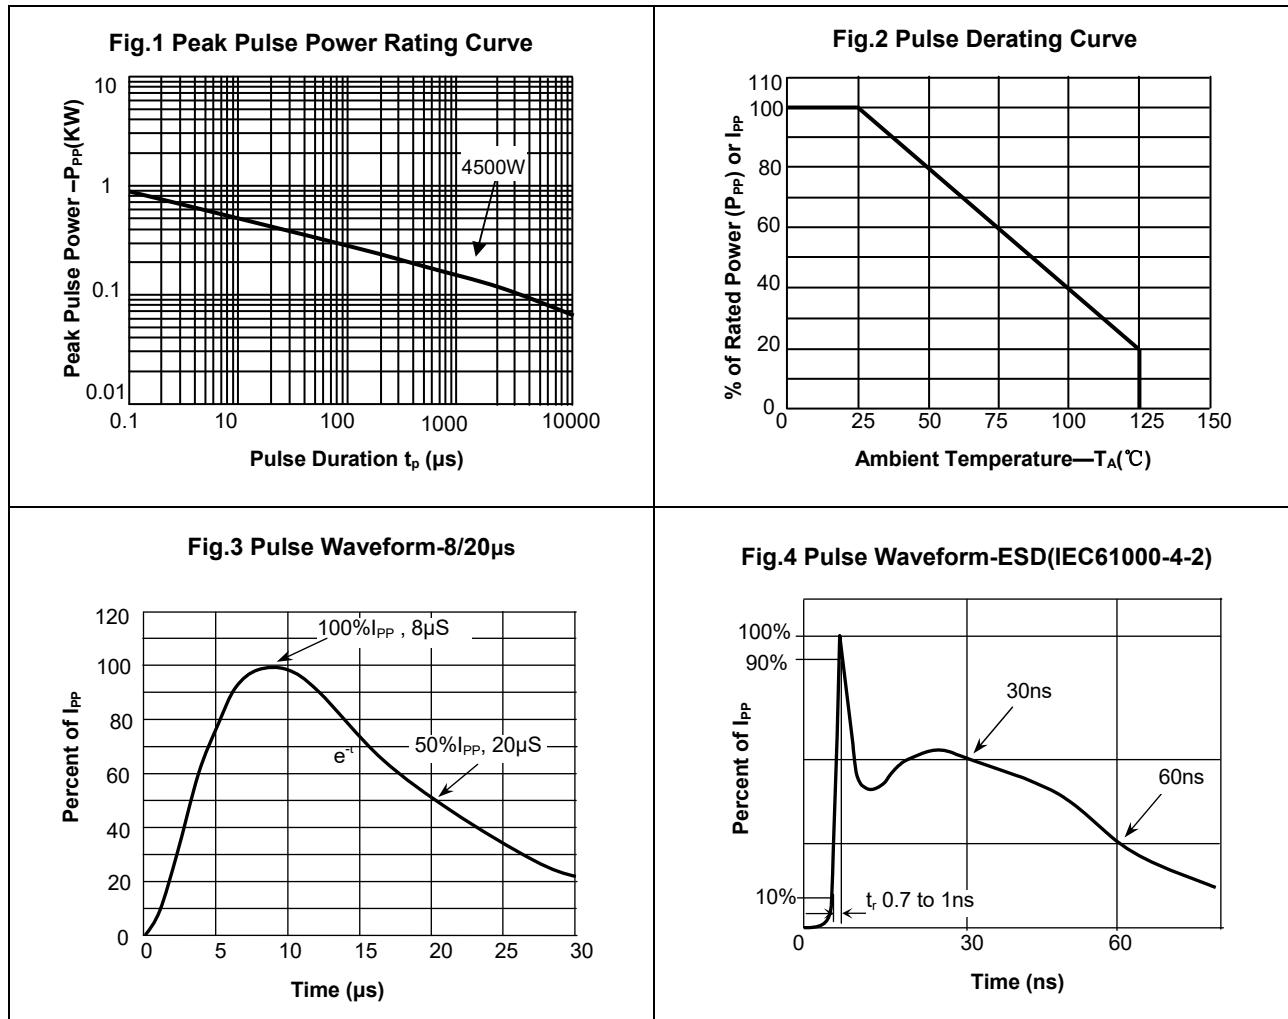
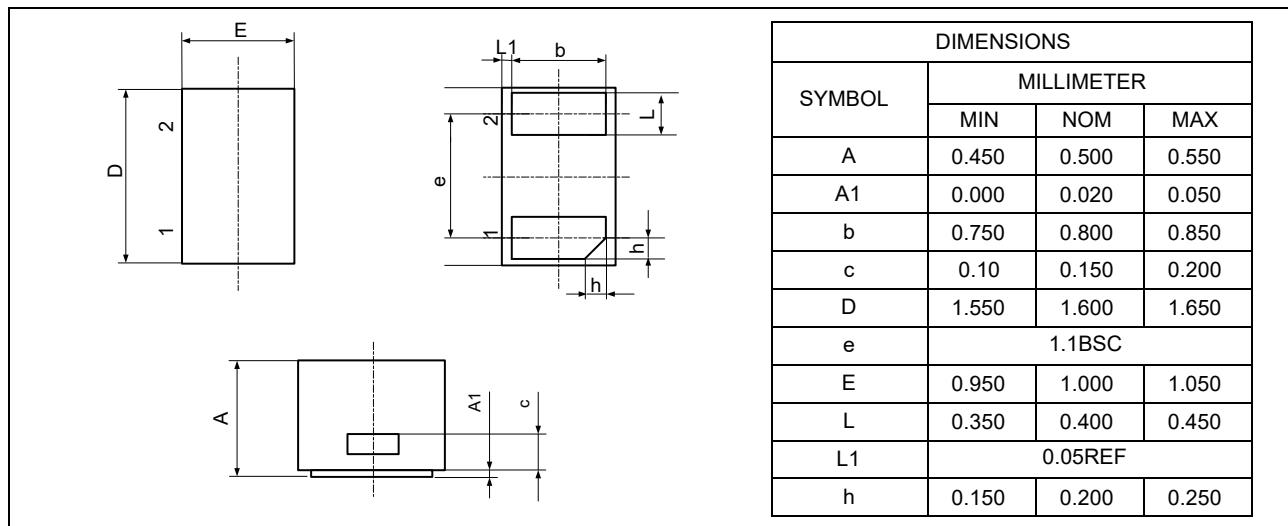
Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_p=8/20\mu s$)	P _{PP}	4500	W
ESD contact/air discharge (IEC-61000-4-2)	V _{ESD}	30/30	kV
Peak Pulse Current ($T_p = 8/20\mu s$)	I _{PP}	150	A
Junction Temperature	T _J	-55 to +125	°C
Storage temperature	T _{STG}	-55 to +150	°C

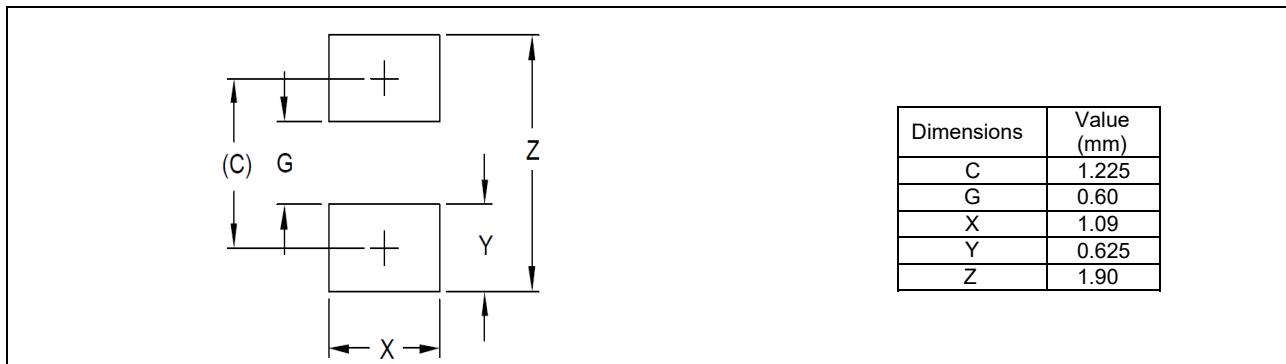
Electrical Characteristics

(T_A = 25 °C unless otherwise specified)

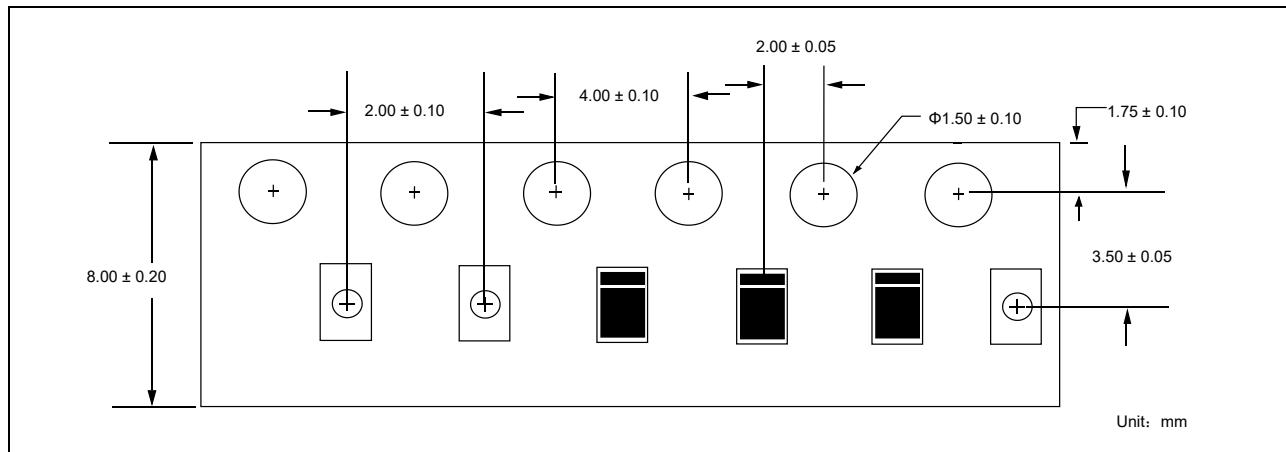
Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V _{RWM}				15	V
Reverse Breakdown Voltage	V _{BR}	I _T =1mA	16.0	18.0		V
Reverse Leakage Current	I _R	V _R =15V			1	uA
Clamping Voltage (IEC 61000-4-5)	V _C	I _{PP} =1A			18	V
Clamping Voltage (IEC 61000-4-5)	V _C	I _{PP} =100A			25	V
Clamping Voltage (IEC 61000-4-5)	V _C	I _{PP} =150A		30		V
Junction Capacitance	C _J	V _R =0V, f=1MHz		300		pF

Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

Package Dimensions


Pad Dimensions



Package Information



Marking



Ordering information

Order code	Package	Packaging option	Base quantity	Weight	Packaging specification
TESD1610HC15VUH	DFN1610	Tape and reel	10000pcs / reel	3.5mg	EIA STD RS-481