
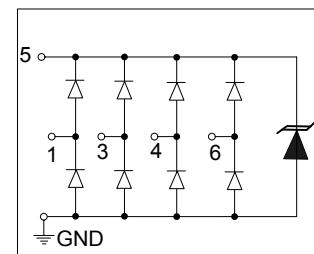
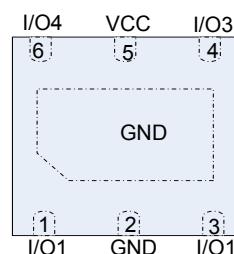


## Ultra Low Capacitance ESD TVS Array in DFN1616-6L

### Features

- 30Watts peak pulse power ( $t_p = 8/20\mu s$ )
- DFN1616-6L Package
- Unidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Low capacitance (0.2pF typical I/O to I/O)
- ESD Protection for high-speed data lines to:  
IEC 61000-4-2 ±8kV contact ±15kV air  
IEC 61000-4-4 (EFT) 40A (5/50ns)  
IEC 61000-4-5 (Lightning) 3.5A (8/20μs)

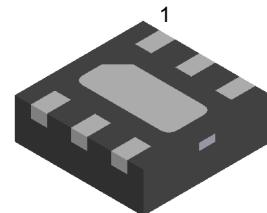

### Mechanical Data

- Case: Plastic package.  
Lead free; RoHS compliant; Halogen free
- Molding Compound Flammability Rating:  
UL 94 V-0
- Terminals: High temperature soldering guaranteed:  
260 °C/10 sec. at terminals

### Applications

- USB 2.0/3.0
- Video Line Protection
- Analog Video
- LAN/WAN equipment
- Microcontroller Input Protection

### Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ( $T_p=8/20\mu s$ )	$P_{PP}$	30	W
ESD contact/air discharge (IEC-61000-4-2)	$V_{ESD}$	8/15	kV
Peak Pulse Current ( $t_p = 8/20\mu s$ )	$I_{PP}$	3.5	A
Junction Temperature	$T_J$	-55 to +125	°C
Storage temperature	$T_{STG}$	-55 to +150	°C


### Electrical Characteristics

( $T_A = 25$  °C unless otherwise specified)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	$V_{RWM}$				5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	6			V
Reverse Leakage Current	$I_R$	$V_R=5V$			0.5	uA
Clamping Voltage(SURGE)	$V_C$	$I_{PP}=3.5A, T_p=8/20\mu s$		10		V
Junction Capacitance	$C_J$	$V_R=0V, f=1MHz, I/O to I/O$		0.2		pF
	$C_J$	$V_R=0V, f=1MHz, I/O to GND$		0.4		pF

### Typical Characteristics ( $T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)


**Fig.1 Peak Pulse Power Rating Curve**

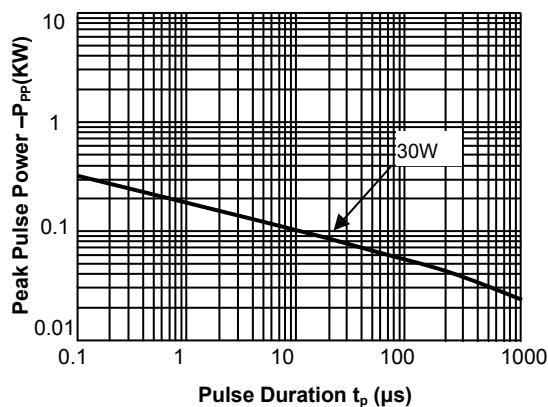


**Fig.2 Pulse Derating Curve**

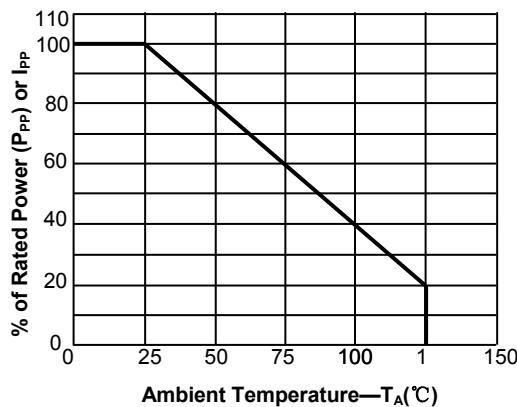


**Fig.3 Pulse Waveform-8/20μs**

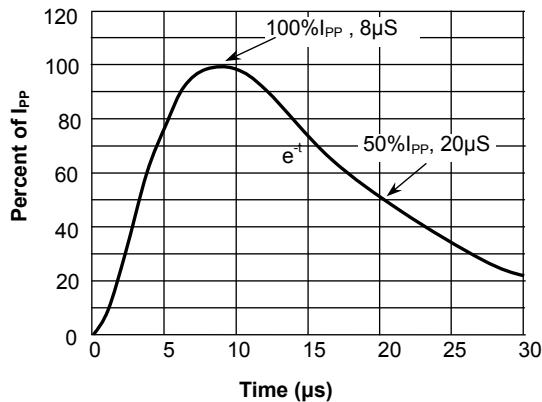


**Fig.4 Pulse Waveform-ESD(IEC61000-4-2)**

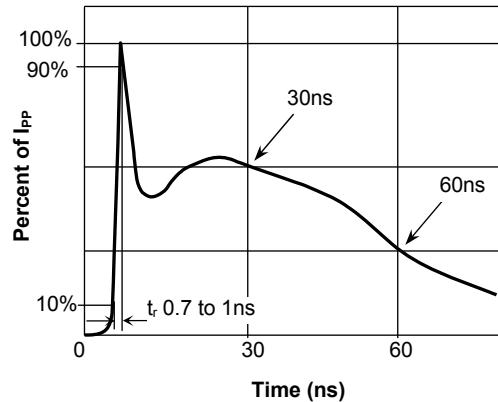


**Fig.5 Eye Diagram - HDMI mask at 3.4Gbps per channel**

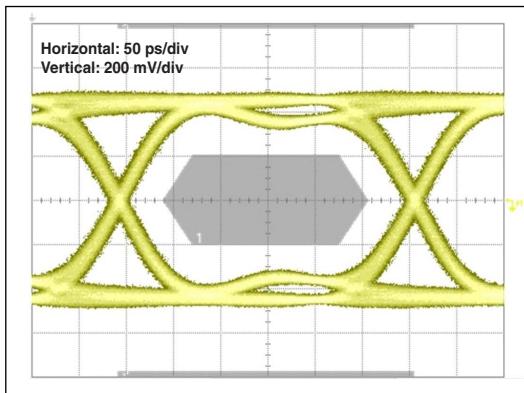


**Fig.6 Insertion Loss S21 - I/O to GND**

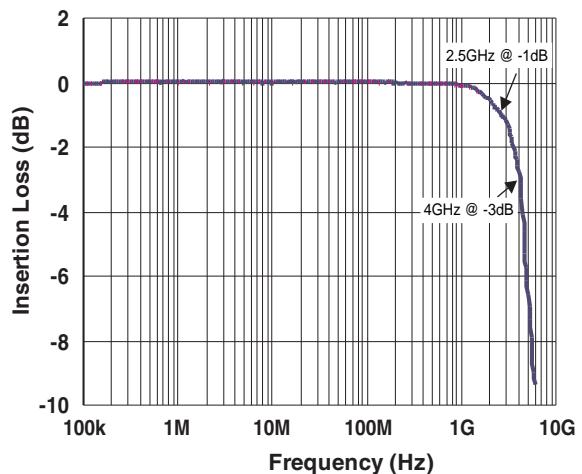

## Package Dimensions

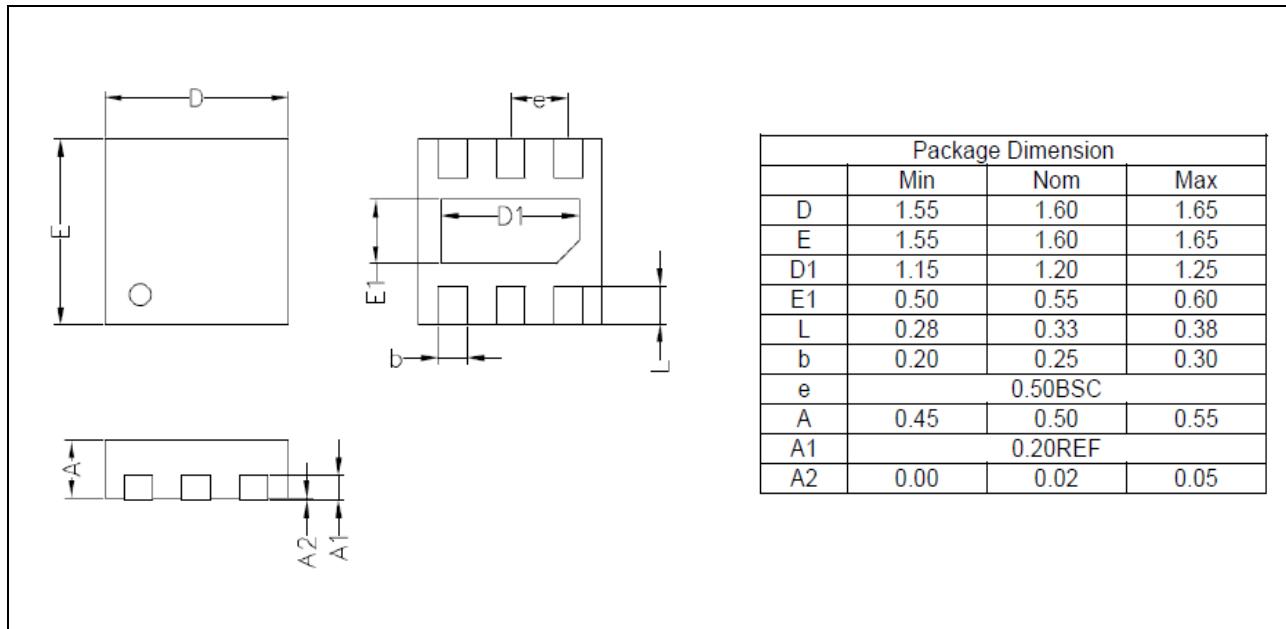

## Part number system

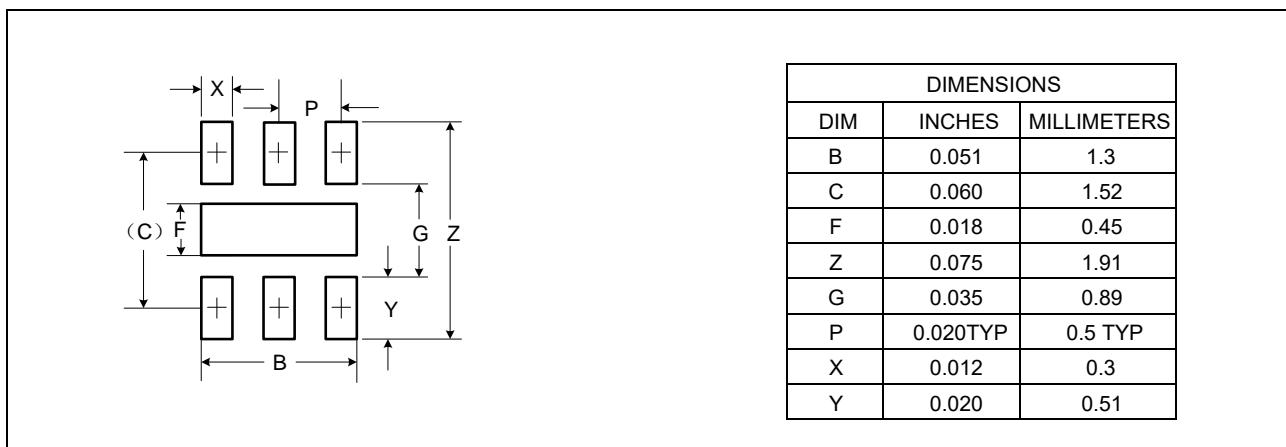

## Ordering information

Order code	Marking	Package	Packaging option	Base quantity	Packaging specification
TESD1616UC5VU	M54	DFN1616-6L	Tape and reel	3000pcs / reel	EIA STD RS-481