



EOS/ESD Protection Diode in DFN-2020-3L

Features

- 6000 Watts peak pulse power ($t_p = 8/20\mu s$)
- DFN-2020-3L package
- Unidirectional configurations
- Low clamping voltage
- Low leakage current
- Medium capacitance ($C_j = 2600pF$ typ.)
- Protection one data/power line to:
 - IEC 61000-4-2 $\pm 30kV$ contact $\pm 30kV$ air
 - IEC 61000-4-4 (EFT) 40A (5/50ns)
 - IEC 61000-4-5 (Lightning) 300A (8/20 μs)



Mechanical Data

- **Case:** DFN-2020-3L (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Power lines
- USB Vbus Industrial Electronics
- Industrial Electronics
- Microcontroller Input Protection
- Computer & Consumer Electronics
- Automotive and Telecommunication

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified


Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_P = 8/20\mu s$)	P_{PP}	6000	W
ESD contact/air discharge (IEC-61000-4-2)	V_{ESD}	30/30	kV
Peak Pulse Current ($T_P = 8/20\mu s$)	I_{PP}	300	A
Junction Temperature	T_J	-55 to +125	°C
Storage temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics


($T_A = 25\text{ °C}$ unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1mA$	5.6			V
Reverse Leakage Current	I_R	$V_R = 5V$			5	μA
Clamping Voltage (IEC 61000-4-5)	V_C	$I_{PP} = 50A$			9	V
Clamping Voltage (IEC 61000-4-5)	V_C	$I_{PP} = 100A$			15	V
Clamping Voltage (IEC 61000-4-5)	V_C	$I_{PP} = 300A$			20	V
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz$		2600		pF


Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

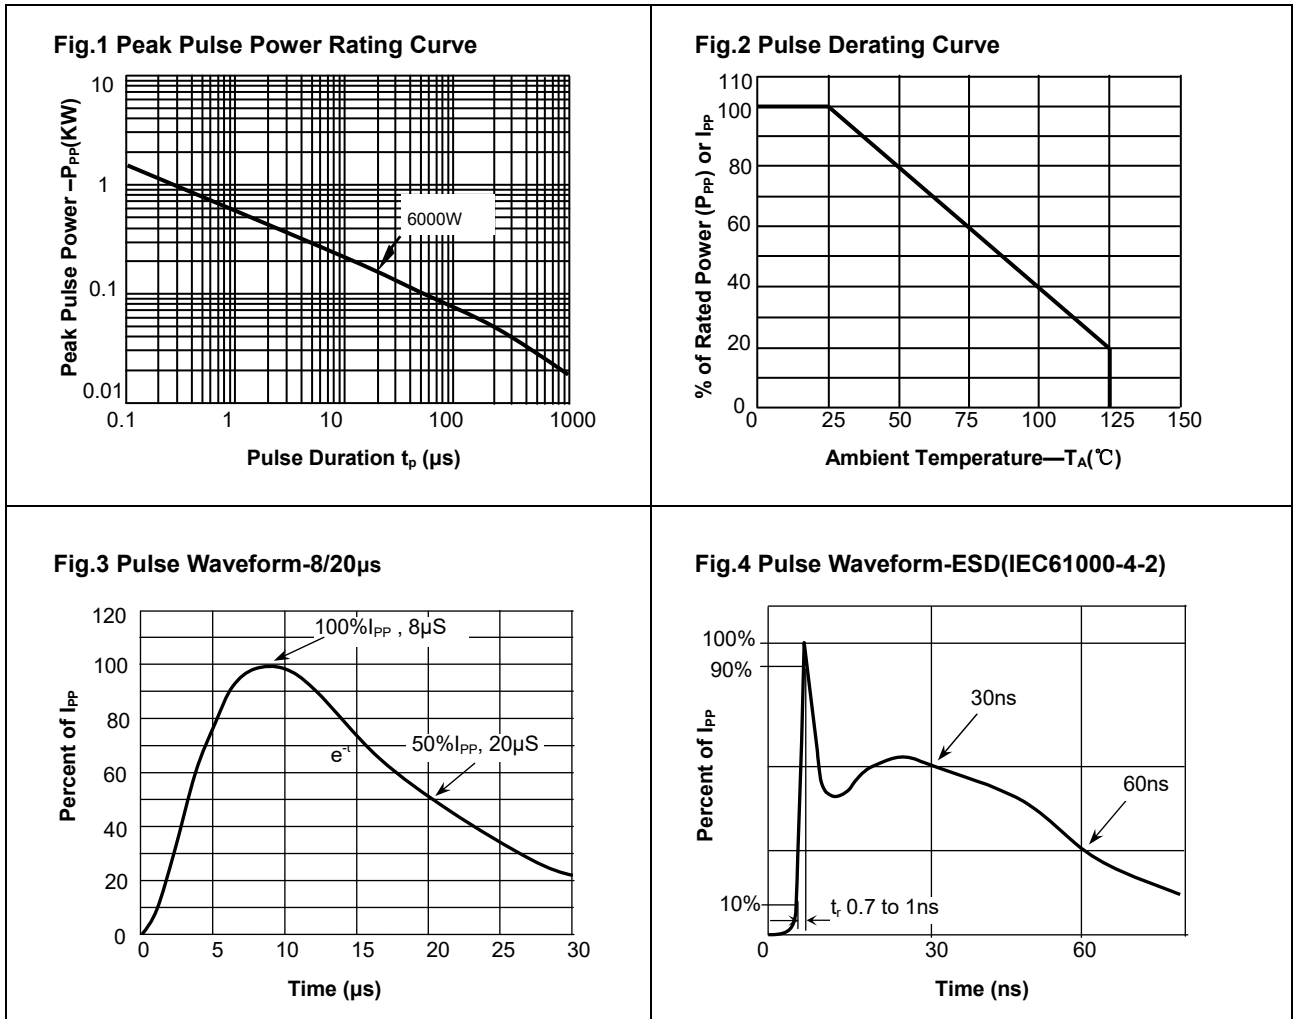


Package Dimensions

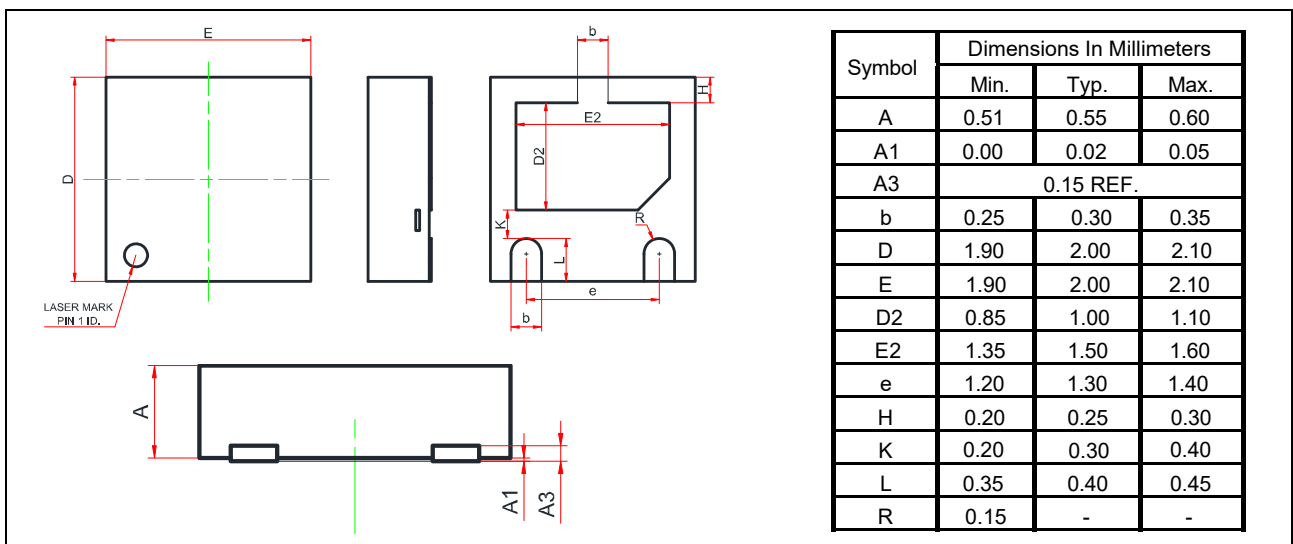

PAD Dimensions

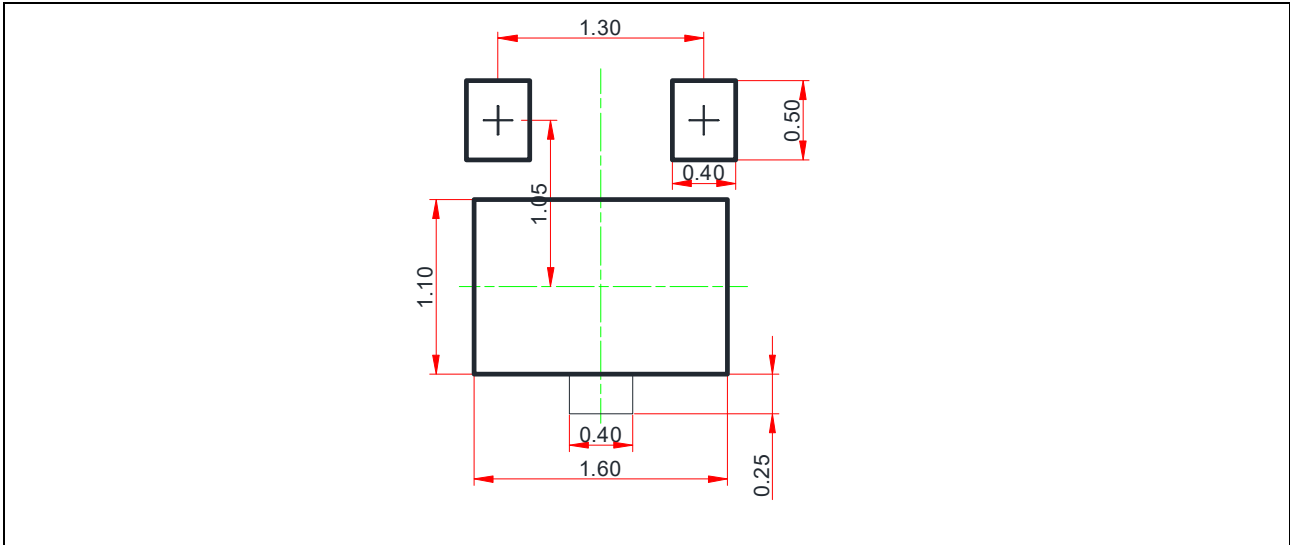

Package information

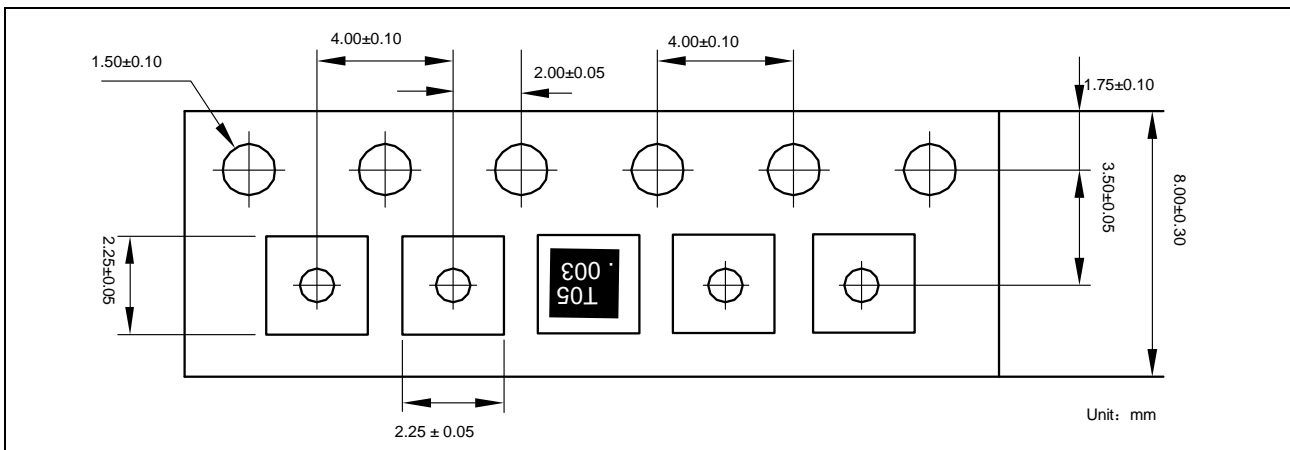

Marking



Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
TESD2020HC5VU	DFN2020-3L	Tape and reel	3000pcs / reel	EIA STD RS-481