




SF61 thru SF69

Glass Passivated Super Fast Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 6.0 Amperes

Features


- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability



DO-201AD

Mechanical Data

- ◆ Case: Molded plastic DO-201AD
- ◆ Epoxy: UL 94V-O rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed:
250°C/10 seconds .375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ◆ Mounting position: Any
- ◆ Weight: 0.041 ounce, 1.15 grams

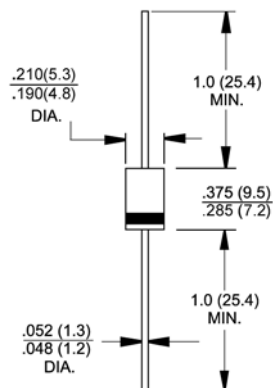

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbols	SF61	SF62	SF63	SF64	SF65	SF66	SF67	SF68	SF69	Units	
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	600	800	1000	Volts	
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	560	700	Volts	
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	800	1000	Volts	
Maximum average forward rectified current .375" (9.5mm) lead length @T _A =55°C	I _(AV)	6.0									Amps	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0									Amps	
Maximum instantaneous forward voltage @ 6.0A DC	V _F	0.975				1.3		1.7			Volts	
Maximum DC reverse current @ T _A =25°C at rated DC blocking voltage @ T _A =125°C	I _R	5.0				100						uA uA
Maximum reverse recovery time (Note 1)	t _{rr}	35									nS	
Typical junction capacitance (Note 2)	C _J	115				60					pF	
Typical thermal resistance	R _{θJA} R _{θJL}	20				5.0					°C/W	
Operating junction temperature range	T _J	-55 to +150									°C	
Storage temperature range	T _{STG}	-55 to +150									°C	

- Notes:**
1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

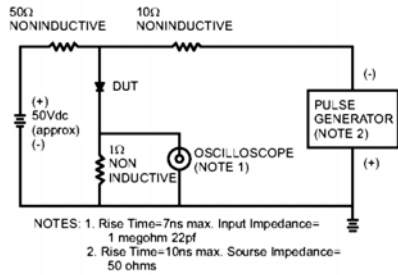


FIG.2- MAXIMUM AVERAGE FORWARD CURRENT DERATING




FIG.3- TYPICAL REVERSE CHARACTERISTICS

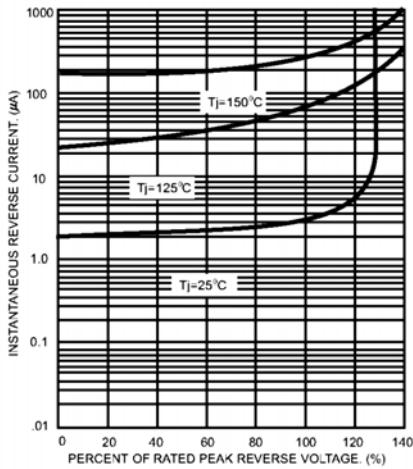


FIG.4- TYPICAL FORWARD CHARACTERISTICS

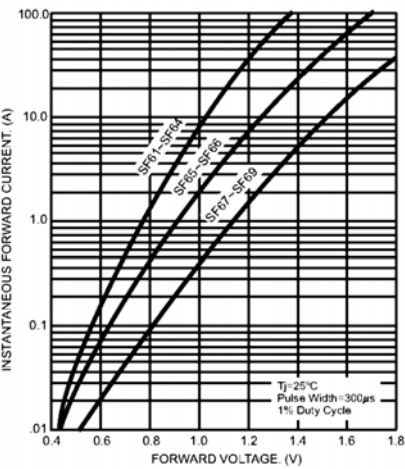


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

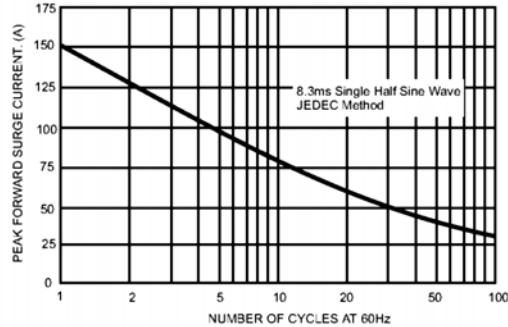


FIG.6- TYPICAL JUNCTION CAPACITANCE

