



FR201G thru FR207G

Glass Passivated Fast Recovery Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 2.0 Amperes

Features


- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability



DO-204AC (DO-15)

Mechanical Data

- ◆ Case: Molded plastic DO-204AC(DO-15)
- ◆ Epoxy: UL 94V-O rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed:
250°C/10 seconds .375" (9.5mm) lead
lengths at 5 lbs., (2.3kg) tension
- ◆ Mounting position: Any
- ◆ Weight: 0.014 ounce, 0.395 gram

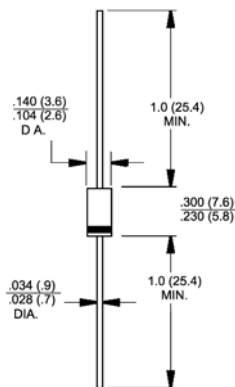

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbols	FR201G	FR202G	FR203G	FR204G	FR205G	FR206G	FR207G	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length @T _A =55°C	I _(AV)	2.0							Amps
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	55.0							Amps
Maximum instantaneous forward voltage @ 2.0A DC	V _F	1.3							Volts
Maximum DC reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R	5.0 100							uA
Maximum reverse recovery time (Note 1)	t _{tr}	150				250	500		nS
Typical junction capacitance (Note 2)	C _J	25							pF
Operating temperature range	T _J	-55 to +150							°C
Storage temperature range	T _{STG}	-55 to +150							°C

- Notes:**
1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

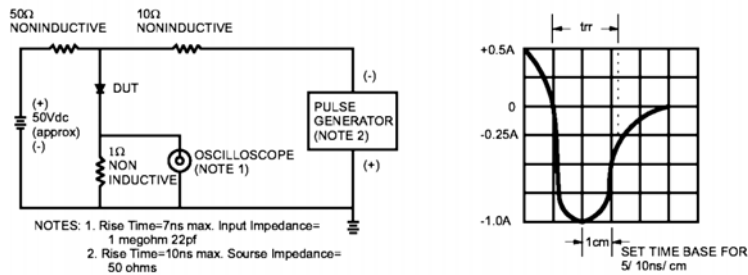


FIG.3- TYPICAL FORWARD CHARACTERISTICS

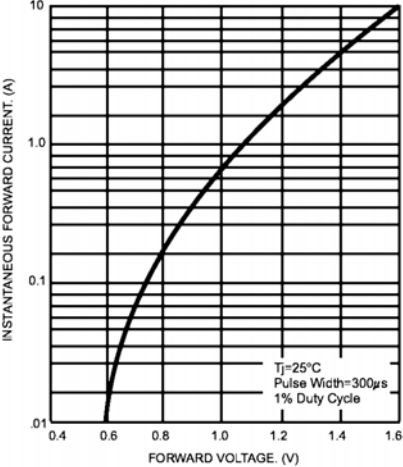


FIG.2- TYPICAL JUNCTION CAPACITANCE

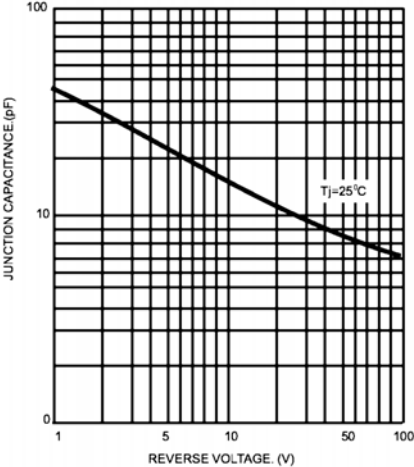


FIG.5- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

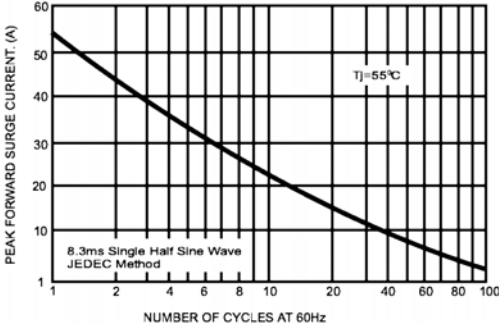


FIG.4- MAXIMUM FORWARD CURRENT DERATING CURVE

